



### CENTURY WL 300


Lift Capacity	4,000 lbs. extended or retracted with "L" Arms
Tow Capacity	7,500 lbs.
Extended Distance from Tailboard	61 3/8"
Power	2-Spool 12 volt electro - hydraulic power unit or diverter valve for installation on hydraulic wrecker
Tilt	Auto Tilt
Lift Attachments	4,000 lb. Slide-In "L" Arms
Optional Equipment	Trailer Ball Adapter



**W 300**

### CENTURY WL 6500

Lift Capacity	4,000 lbs. with standard "L" arms 6,500 lbs. extended with lift forks 9,000 lbs. retracted with lift forks
Tow Capacity	20,000 lbs.
Extended Distance from Tailboard to C.L. of Fork	68 1/2"
Power	3-Spool 12 volt electro - hydraulic power unit
Tilt	Independent Power
Lift Attachments	4,000 lb. Slide-In "L" Arms 1 Pair of 3" lift forks & fork adapters
Optional Equipment	Trailer Ball Adapter Additional Lift Forks 6,000 lb. "L" Arms in lieu of 4,000 lb. "L" Arms

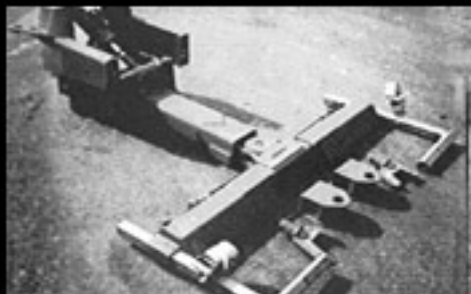

**WL 6500**

### CENTURY FORMULA

Lift Capacity	6,000 lbs. with standard "L" arms 10,000 lbs. extended with lift forks 12,000 lbs. retracted with lift forks
Tow Capacity	50,000 lbs.
Extended Distance from Tailboard to C.L. of Fork	85"
Power	Unit comes standard with hydraulic valve and hand held remote control. Unit does not include necessary hydraulic fittings or hoses to connect to existing hydraulic system. Optional hydraulic kit for installation on mechanical wrecker is available.
Tilt	Optional independent power or Auto-Tilt



**Fomula III T**

Lift Attachments	6,000 lb. Slide-In "L" Arms 3 pair of lift forks (3" short, medium, tall) 1 pair fork adapters
Optional Equipment	Trailer Ball Adapter Pintel Hook Adapter Additional Lift Forks Chain Lift Adapter

**Note: Specifications subject to change without notice. All ratings specified are based on structural factors only, not vehicle capacities or capabilities.**