



PRO 4000


Lift Capacity
Tow Capacity
Extended Distance
from Tailboard
Power

Tilt
Lift Attachments
Optional Equipment

HOLMES PRO 4000

4,000 lbs. extended or retracted with "L" Arms
7,500 lbs.
61 3/8"

2-Spool 12 volt electro - hydraulic power unit or
diverter valve for installation on hydraulic wrecker
Auto Tilt
4,000 lb. Slide-In "L" Arms
Trailer Ball Adapter

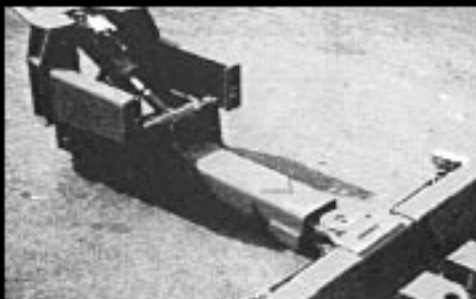

PRO 6500

Lift Capacity

Tow Capacity
Extended Distance
from Tailboard to
C.L. of Fork
Power
Tilt
Lift Attachments

Optional Equipment

HOLMES PRO 6500

4,000 lbs. with standard "L" arms
6,500 lbs. extended with lift forks
9,000 lbs. retracted with lift forks
20,000 lbs.
68 1/2"


3-Spool 12 volt electro - hydraulic power unit
Independent Power
4,000 lb. Slide-In "L" Arms
1 Pair of 3" lift forks & fork adapters
Trailer Ball Adapter
Additional Lift Forks
6,000 lb. "L" Arms in lieu of 4,000 lb. "L" Arms

HOLMES MD 10000

Lift Capacity

Tow Capacity
Extended Distance
from Tailboard to

6,000 lbs. with standard "L" arms
10,000 lbs. extended with lift forks
12,000 lbs. retracted with lift forks
50,000 lbs.
85"

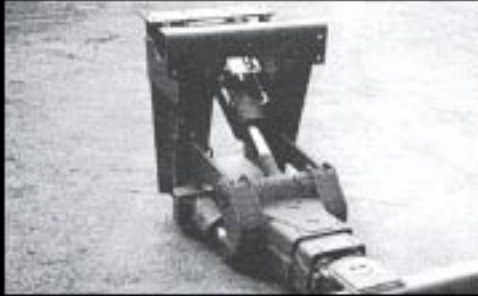

MD 10000

C.L. of Fork

Power

Unit comes standard with hydraulic valve and hand held remote control. Unit does not include necessary hydraulic fittings or hoses to connect to existing hydraulic system. Optional hydraulic kit for installation on mechanical wrecker is available.

Tilt

Optional independent power or Auto-Tilt

Lift Attachments

6,000 lb. Slide-In "L" Arms
3 pair of lift forks
(3" short, medium, tall)

Optional Equipment

1 pair fork adapters
Trailer Ball Adapter
Pintel Hook Adapter
Additional Lift Forks
Chain Lift Adapter